

## LED Filament G30(7W/8W)

### Description:

Efficacy: 120lm/W  
 Life Time: 25,000 HR  
 RoHS  
 UL Certification

### Replacement:

60W Incandescent Bulbs  
 75W Incandescent Bulbs




### Parameters:

Material: Glass  
 Input Voltage: 120/220VAC; 50/60Hz  
 CCT: 2700K/4000K/6000K  
 CRI: >80

View Angle: 360°  
 Power Supply: Non-Isolate Drive  
 Weight: 55g  
 Life: 25,000 hr

| Part NO.        | CCT   | CRI | Lumen  | Input Voltage | Wattage | PF  | Base | Dim |
|-----------------|-------|-----|--------|---------------|---------|-----|------|-----|
| BL.XXA07JLQC00U | 2700K | 80  | 800lm  | 90-135V/60Hz  | 7W      | 0.5 | E26  | NO  |
| BL.XXA07JLQCD0U | 2700K | 80  | 800lm  | 120V/60Hz     | 7W      | 0.9 | E26  | YES |
| BL.XXB07JKQC000 | 2700K | 80  | 800lm  | 176-264V/50Hz | 7W      | 0.5 | E27  | NO  |
| BL.XXB07JKQCD00 | 2700K | 80  | 800lm  | 220-230V/50Hz | 7W      | 0.7 | E27  | YES |
| BL.XXA08JLQC00U | 2700K | 80  | 1000lm | 90-135V/60Hz  | 8W      | 0.5 | E26  | NO  |
| BL.XXA08JLQCD0U | 2700K | 80  | 1000lm | 120V/60Hz     | 8W      | 0.9 | E26  | YES |
| BL.XXB08JKQC000 | 2700K | 80  | 1000lm | 176-264V/50Hz | 8W      | 0.5 | E27  | NO  |
| BL.XXB08JKQCD00 | 2700K | 80  | 1000lm | 220-230V/50Hz | 8W      | 0.7 | E27  | YES |

## Packing information:

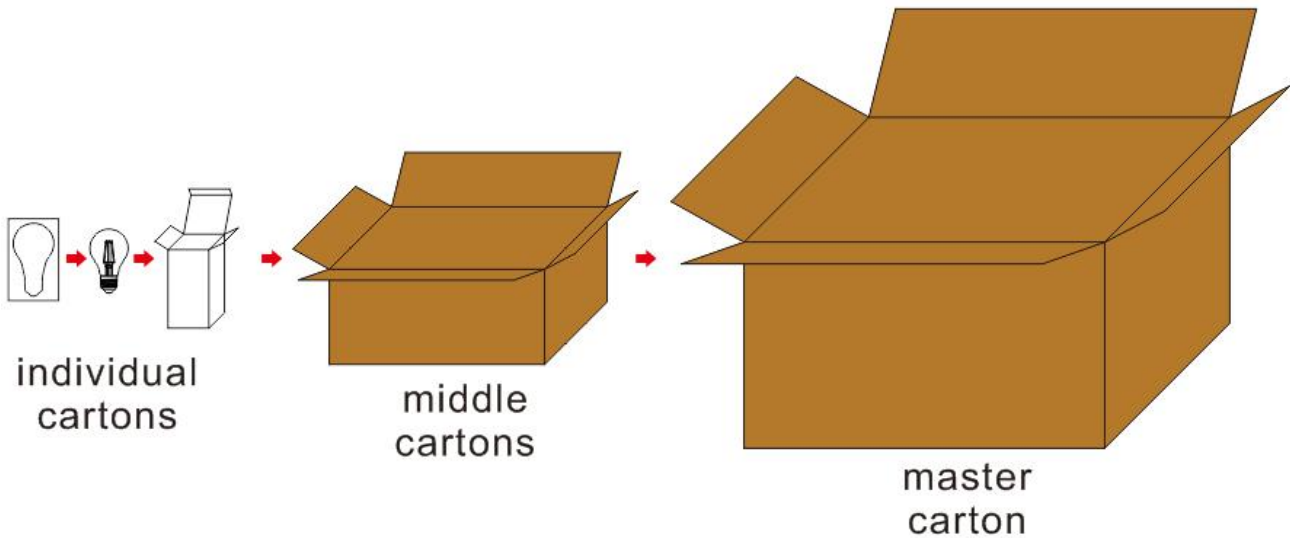

Master carton size:535\*440\*320mm  
 Net weight:2.7kg; Gross weight:8.7kg  
 15 bulbs/middle carton, 4 middle cartons/master carton

## Installation:

Connect to E26/E27 base

## Note:

1. The input voltage is 120/220VAC
2. Turn power off when install the LED filament bulbs
3. Check the bulbs and make sure it's undamaged before installation
4. LED filament bulbs are not suitable for insulated places
5. LED filament bulbs are prohibited installed outdoor place



### Description of Dimmer Matching

Our LED lights have been designed and worked with listed dimmers:

For 2W-5W

**LEVITON:**

R62-6674-P0W  
 C22-6672-1LW  
 R70-6631-1LW

**LUTRON:**

DV-600P-WH  
 MACL-153MR-WH  
 CT-600PR-WH

For >5W

**LEVITON:**

R62-6674-P0W  
 R70-6631-1LW

**LUTRON:**

DV-600P-WH  
 MACL-153MR-WH

**Remark:**

1. Mismatch dimmer may lead to poor lighting effect.
2. Dimming range:20%-80%.
3. For the items less than 3W, one dimmer has to be connected with more than 2pcs each time.